




SPECIFICATIONS

Rated Line Pull	2,500 lbs (1,134 kg) Max
Gear Train System	All Metal Planetary Gear
Reduction Ratio	153:1
Motor	1.78 Hp (1.33 Kw) 12 Volt DC
Winch Line	3/16" x 50' (4.76mm x 15.24m) Cable
Overall Dimensions	13.9" x 4.5" x 4.3" (353 x 114 x 76 mm)
Bolt Pattern	1.9" x 3" (48 x 76 mm)
Shipping Weight	36 lbs (16.4 kg)

K2500EQG

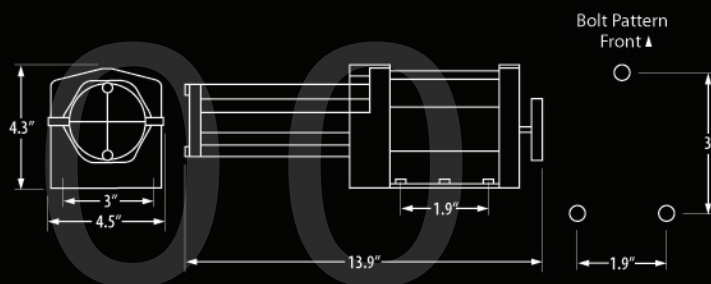

PERFORMANCE OF 1ST LAYER

Line Pull		Line Speed		Motor Current
Lbs	Kgs	Fmp	Mpm	Amp
0	0	8.8	3	10
800	363	6.5	2.8	50
1500	680	5	2.5	90
2500	1135	4	2	110

LINE PULL & CAPACITY BY LAYER

Cable Layer	Rated Line Pull		Cable Capacity	
	Lbs	Kgs	Ft	Meters
1	2500	1135	6.5	2
2	1850	850	16.4	5
3	1400	653	26	8
4	1100	500	37.7	11.5
5	890	360	50	15

THIS WINCH INCLUDES

- Pre-wired Handlebar Switch with 8' of Wire
- 50' Winch Cable With Roller Fairlead & Hook
- All Assembly Hardware
- Colour Coded Power Cables



ALL WINCHES INCLUDE

THE BEAR ESSENTIALS KIT

