



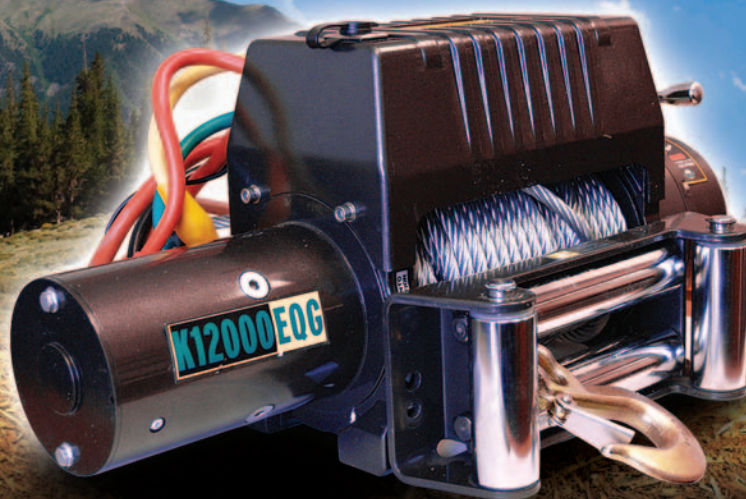

SPECIFICATIONS

Rated Line Pull	12,000 lbs (5,443 kg) Max
Gear Train System	All Metal Planetary Gear
Reduction Ratio	295.75:1
Motor	4.8 Hp (3.85 Kw) 12 Volt DC
Winch Line	3/8" x 100' (9.53 mm x 30.48 m) Cable
Overall Dimensions	22.3" x 6.3" x 11" (566 x 160 x 279 mm)
Bolt Pattern	10" x 4.5" (254 x 114 mm)
Shipping Weight	125 lbs (56.7 kg)

K12000EQG

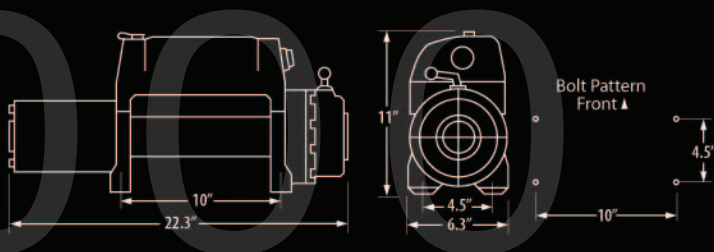

PERFORMANCE OF 1ST LAYER

Line Pull		Line Speed		Motor Current
Lbs	Kgs	Fmp	Mpm	Amp
0	0	14	4.2	90
4000	1816	9.2	2.8	90
6000	2724	7.9	2.4	230
8000	3632	6.9	2.1	260
10000	4540	6.5	2	300
12000	5448	5.9	1.8	330

LINE PULL & CAPACITY BY LAYER

Cable Layer	Rated Line Pull		Cable Capacity	
	Lbs	Kgs	Ft	Meters
1	12000	5448	15	5
2	10200	4631	38	11.5
3	8400	3814	64	19.5
4	7300	3314	95	29
5	6500	2950	100	30.5

THIS WINCH INCLUDES

- Remote control with 15' of Wire
- 100' Winch Cable With Roller Fairlead & Hook
- All Assembly Hardware
- Colour Coded Power Cables
- Easily Clockable Clutch Handle

ALL WINCHES INCLUDE

THE BEAR ESSENTIALS KIT

WINCH BAG

2 TON TREE SAVER



2 SHACKLES

GUIDE ROLLER

WINCH GLOVES

www.kodiakwinch.com