




SPECIFICATIONS

Rated Line Pull	8,000 lbs (3,629kg) Max
Gear Train System	All Metal Planetary Gear
Reduction Ratio	152:1
Motor	4.8 Hp (3.58 Kw) 12 Volt DC
Winch Line	5/16" x 100' (8mm x 30.48m) Synthetic Rope
Overall Dimensions	22.5" x 6.6" x 11.3" (570 x 166 x 285 mm)
Bolt Pattern	10" x 4.5" (254 x 114 mm)
Shipping Weight	94 lbs (36 kg)

K8000EXTQG

Extreme Trail Series

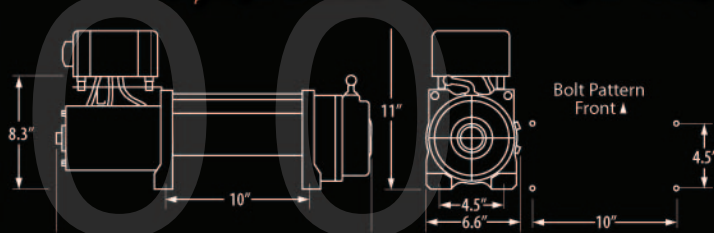

PERFORMANCE OF 1ST LAYER

Line Pull		Line Speed		Motor Current
Lbs	Kgs	Fmp	Mpm	Amp
0	0	26	7.9	95
2000	907	20	6	175
4000	1814	14	4.3	240
6000	2722	12	3.8	295
8000	3629	10.8	3.3	370

LINE PULL & ROPE CAPACITY BY LAYER

Cable Layer	Rated Line Pull		Cable Capacity	
	Lbs	Kgs	Ft	Meters
1	8000	3629	21	6.2
2	6335	2874	43	13
3	5243	2378	68	20.8
4	4473	2029	92	28
5	3190	1447	-	-

THIS WINCH INCLUDES

- Fast Performance Line Speed
- Low Electric Current
- Automatic Load-Holding Brake
- Power In and Power Out
- Non-Integrated Water-Proof Solenoid
- Remote Control with 15' Wire
- Wireless Remote Control
- All Assembly Hardware
- Colour Coded Power Cables
- Easily Clockable Clutch Handle

ALL WINCHES INCLUDE

THE BEAR ESSENTIALS KIT

WINCH BAG

2 TON TREE SAVER



2 SHACKLES

GUIDE ROLLER

WINCH GLOVES

www.kodiakwinch.com